

EN

# Modular Comfort Lifts

iD Sf E D

Overall view




LIFTINGITALIA<sup>®</sup>  
MODULAR COMFORT LIFTS

MADE IN ITALY



# Overall installation configurations

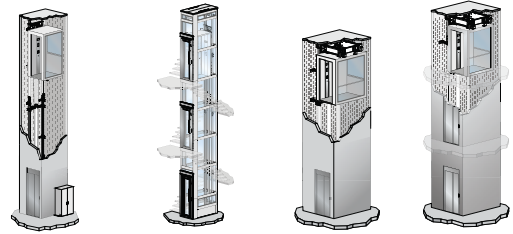

## PRODUCT SPECIFICATIONS

inDOMO

STAIRfit

EXCEL

DOMINO

	inDOMO	STAIRfit	EXCEL	DOMINO
MAX PAYLOAD	500 kg	250 kg	1000 kg	1000 kg
MAX TRAVEL	20 m	20 m	24 m	20 m
MAX ENTRANCES	3	1	2 opposite	3
MAX STOPS (in line)	8	8	9	8

## SHAFT

CONCRETE OR MASONRY	■	—	■	■
STEEL STRUCTURE, PAINTED RAL	□	■	□	□
STAINLESS STEEL STRUCTURE (AISI 304 or AISI 316 FOR MARINE ENVIRONMENT)	□	—	□	□

## CARS

SMART - skinplate	■	—	■	■
STYLE - stainless steel	□	—	□	□
IDEA - solid colour laminate	□	■	—	—
OPERA - horizontal wooden-like laminate	□	—	—	—
1 GLASS WALL	□	—	□	□
2 GLASS WALLS	□	■	—	□

## CAR DOORS

WITHOUT DOOR (with LIGHT CURTAIN)	■	■	—	—
AUTOMATIC SLIDING, 2-PANELS SIDE OPENING (BL-GL)	□	—	■	■
AUTOMATIC SLIDING, 2-PANELS CENTRE OPENING (BL-GL)	□	—	☒	☒
AUTOMATIC SLIDING, 3-PANELS SIDE OPENING (BL-GL)	□	—	—	—
AUTOMATIC TWIST FOLDING 2-PANELS (BL-GL)	—	□	—	—
AUTOMATIC TWIST FOLDING 4-PANELS (BL-GL)	□	□	—	—

## LANDING DOORS

IRON – STEEL (BL-GL) <sup>(1)</sup>	□	—	—	—
LUMIERE ALUMINIUM (GL-BL)	■	■	—	—
MOTORIZED myDOMO ALUMINIUM (GL-BL) – stand alone	□	—	—	—
myDOMO pack (coupled with TWIST) (GL-BL)	□	—	—	—
AUTOMATIC SLIDING , 2-PANELS SIDE OPENING (BL-GL) <sup>(1)</sup>	□	—	■	■
AUTOMATIC SLIDING , 2-PANELS CENTRE OPENING (BL-GL) <sup>(1)</sup>	□	—	☒	☒
AUTOMATIC SLIDING , 3-PANELS SIDE OPENING (BL-GL) <sup>(1)</sup>	□	—	—	—

## HYDRAULIC TRACTION






Indirect acting 2:1	■	■	■	■
Side direct acting 1:1	☒	—	—	—

(1) available also E120 and FIRE RATED EI120 executions.

## LEGEND

■ Standard	☒ Option, no extra price	□ Optional	— Not available
BL: BLIND version	GL: GLAZED version	SGL: WINDOW version	

Example of  
HYDRAULIC INSTALLATION (2 :1)

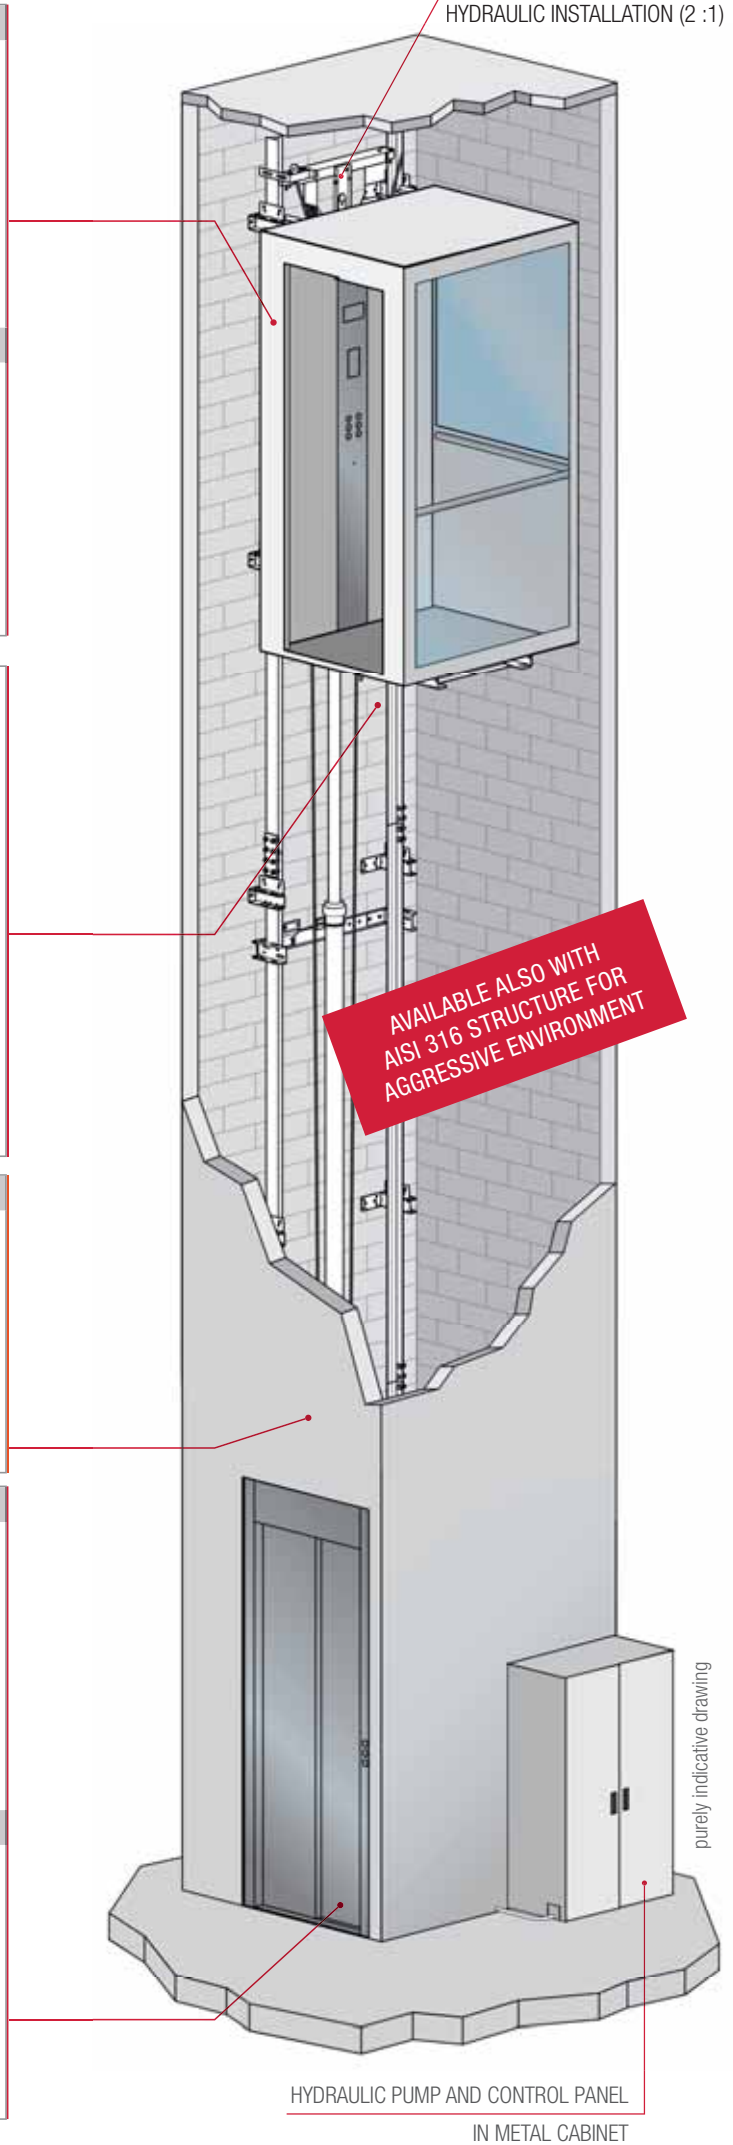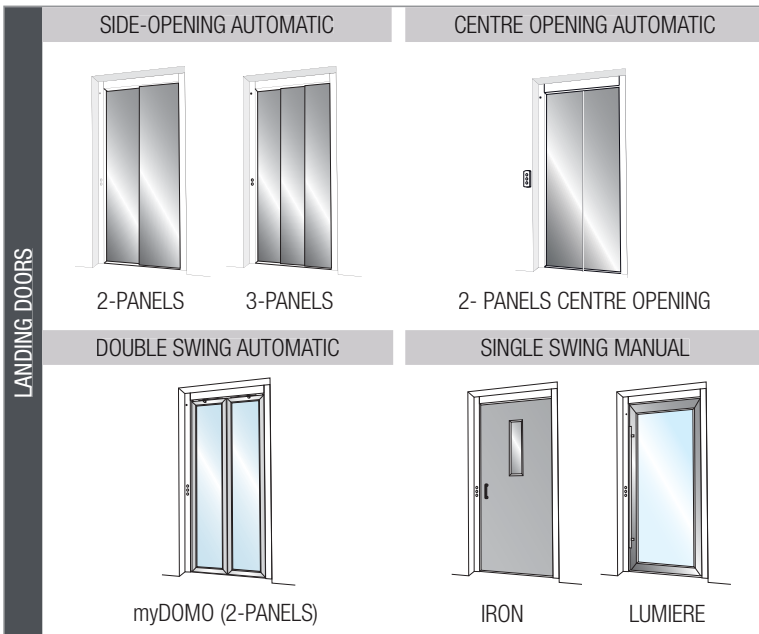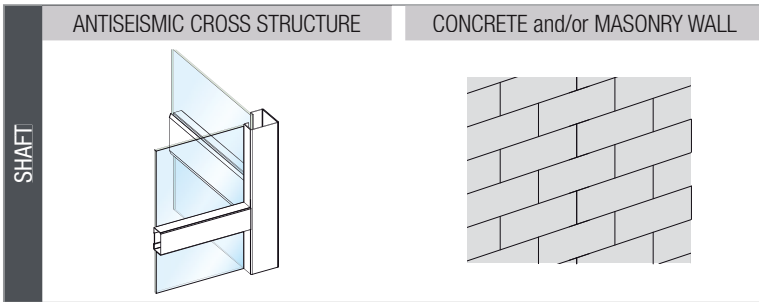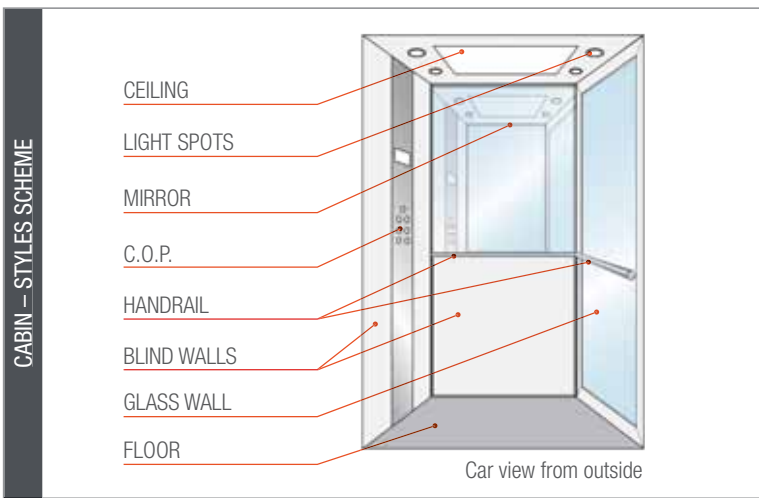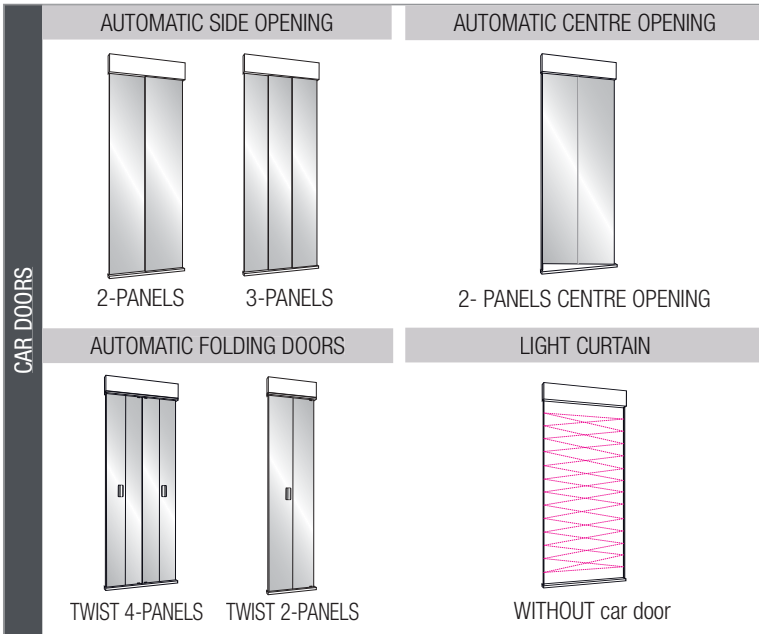



OUTDOOR



INDOOR



INTENDED USE



INTENDED USE



MAX PAYLOAD



ENERGY EFFICIENCY



230 Vac single phase

## ■ STRENGTH AND RELIABILITY

inDOMO means reliability and safety. Thanks to the hydraulic traction, to the solid structure and to the safety devices (blackout emergency descent, automatic rescue call and much more) you will never have to fear of being stuck in the cabin.


## ■ TOP COMFORT AT THE BEST PRICE

inDOMO is the mini-lift for those who don't accept compromises. Top comfort and quietness levels, smooth starts and stops, great lighting and best technologies create the best travel experience in the category.

## ■ LIVING SPACE


The 2018 range shows a completely renewed line of cabins, with a clean and essential design which will give your house an unmistakable touch of elegance.

PAYLOADS:	From 250 up to 500 kg
TRAVEL:	Up to 20 m
STOPS:	Up to 8 (in line)
ENTRANCES:	Up to 3
SPEED:	0,15 m/s (EU) - 0,30 m/s (EEU)
SHAFT:	Masonry shaft or Anti-seismic structure
CONTROL:	Hold to run and Automatic
NOISE LEVEL:	47 dB
CABIN DIMENSION:	Max. 1100 (L) x 1700 (P)
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2200)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2100)
HEADROOM:	Std. 2400 mm
PIT:	Min. 100 mm - max. 200 mm
CYCLES/HOUR:	15
POWER SUPPLY:	Single phase 230 Vac (3-phase 400 Vac as option)
MAIN CONTROL PANEL and HYRAULIC SYSTEM :	In metal cabinet (optional)
REFERENCE REGULATION:	D.M. 2006/42/CE – EN81.41

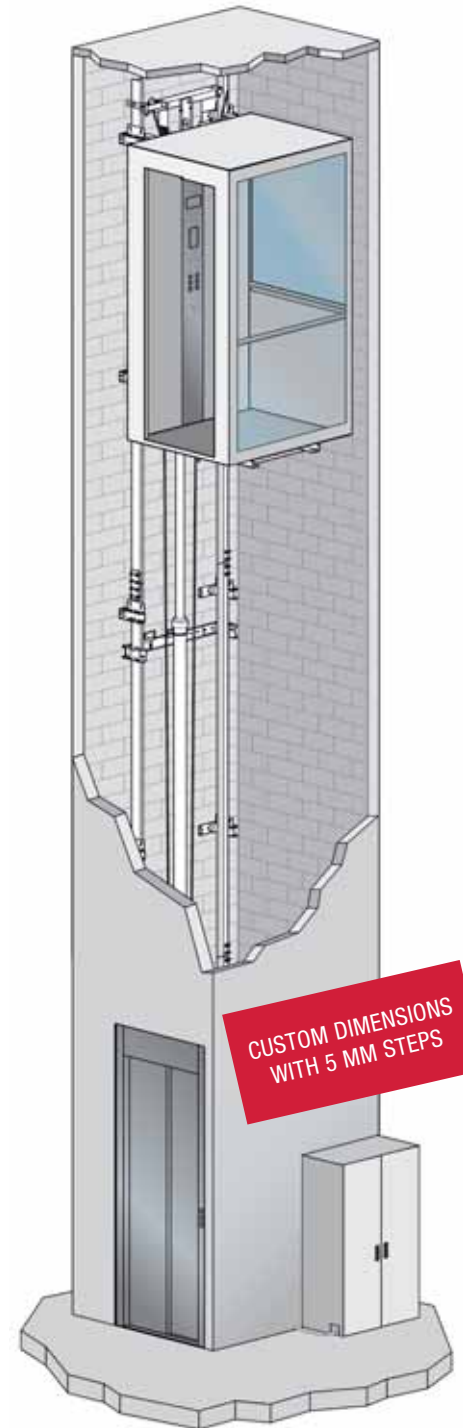


AVAILABLE WITH ST STEEL AISI316 ANTI-SEISMIC STRUCTURE FOR MARINE ENVIRONMENT

MIN DIMENSIONS



MAX DIMENSIONS

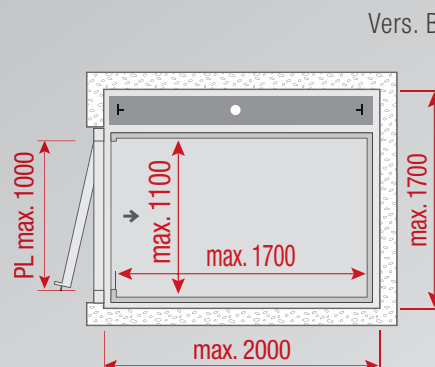

NEW

- MYDOMO PACK -  
AUTOMATIC CAR AND  
LANDING DOORS





OUTDOOR



SUGGESTED  
USE



SUGGESTED  
USE



MAX PAYLOAD



ENERGY  
EFFICIENCY



230 Vac  
single phase

## COMFORT IN REDUCED SPACES

We created STAIRfit for very narrow staircases but keeping a great cabin habitability and comfort thanks to the new “*extra breathing system*” which includes : full height mirror (C side), panoramic side walls, fan and scotch-brite stainless steel finishing.

## CUSTOM DIMENSION TO THE MILLIMETRES

We produce every installation singularly, so that we can take advantage of every inch of available space. STAIRlift was designed to offer the best possible comfort in case of a refurbishment or building upgrades where available spaces are particularly small.


## SAFETY AND RELIABILITY

Even in reduced spaces STAIRlift offers the same level of performance and safety features of a standard mini-lift, so that you can always be relaxed.

PAYLOADS:	250 kg
TRAVEL:	Up to 20 m
STOPS:	Up to 8 (in line)
ENTRANCES:	1
SPEED:	0,15 m/s (EU) - 0,30 m/s (EEU)
SHAFT:	Anti-seismic structure
CONTROL:	Hold to run and Automatic
NOISE LEVEL:	47 dB
CABIN DIMENSION:	Width from 500 ÷ 800 Depth from 650 ÷ 1200
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2200)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2100)
HEADROOM:	Std. 2400 mm
PIT:	200 mm
CYCLES/HOUR:	15
POWER SUPPLY:	Single phase 230 Vac (3-phase 400 Vac as option)
MAIN CONTROL PANEL and HYDRAULIC SYSTEM :	In metal cabinet (optional)
REFERENCE REGULATION:	D.M. 2006/42/CE – EN81.41




## INSTALLATION DIMENSIONS

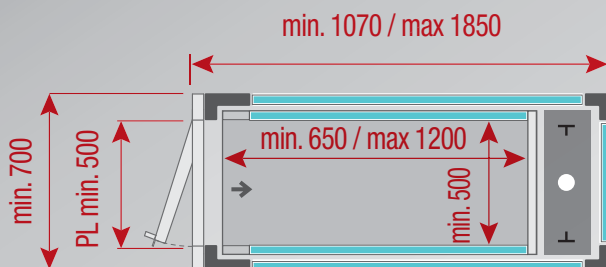

NEW

2-PANELS  
FOLDING DOORS AND  
AUTOMATIC CONTROL





OUTDOOR



INDOOR



SUGGESTED  
USE



SUGGESTED  
USE



MAX PAYLOAD



230 Vac  
single phase

## ■ BIG PAYLOADS AND BIG SPACES

EXCEL is the multi-use platform whenever flexibility and high payloads are required- Ideal for people and goods transport with great performances and total safety. The big cabin dimensions make this lift ideal for commercial or hospital use.


## ■ SIMPLIFIED REGULATION

This lift is according to the Machine Directive therefore its installation and maintenance are simpler than those of a classic elevator.



## ■ REDUCED PIT

Our «reverse» car sling allows for an easy installation wherever a reduced pit is necessary thus reducing structural problems from the very beginning.

PAYLOADS:	From 500 up to 1000 kg
TRAVEL:	Up to 24 m
STOPS:	Up to 9 (in line)
ENTRANCES:	1 or 2 opposites
SPEED:	0,15 m/s (EU) - 0,30 m/s (EEU)
SHAFT:	Masonry shaft or Anti-seismic structure
CONTROL:	Automatic
NOISE LEVEL:	48 dB
MAX CABIN DIMENSION:	1100 (L) x 2100 (P) or 1400 (L) x 1700 (P)
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2300)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2200)
HEADROOM:	up to 630 kg      Std. CH+600 mm - min. CH+500 mm beyond 630 kg    Std. CH+700 mm - min. CH+650 mm
PIT:	Std. 200 mm - min. 150 mm
CYCLES/HOUR:	15
POWER SUPPLY:	Single phase 230 Vac (3-phase 400 Vac as option)
MAIN CONTROL PANEL and HYDRAULIC SYSTEM :	In metal cabinet (optional)
REFERENCE REGULATION:	D.M. 2006/42/CE

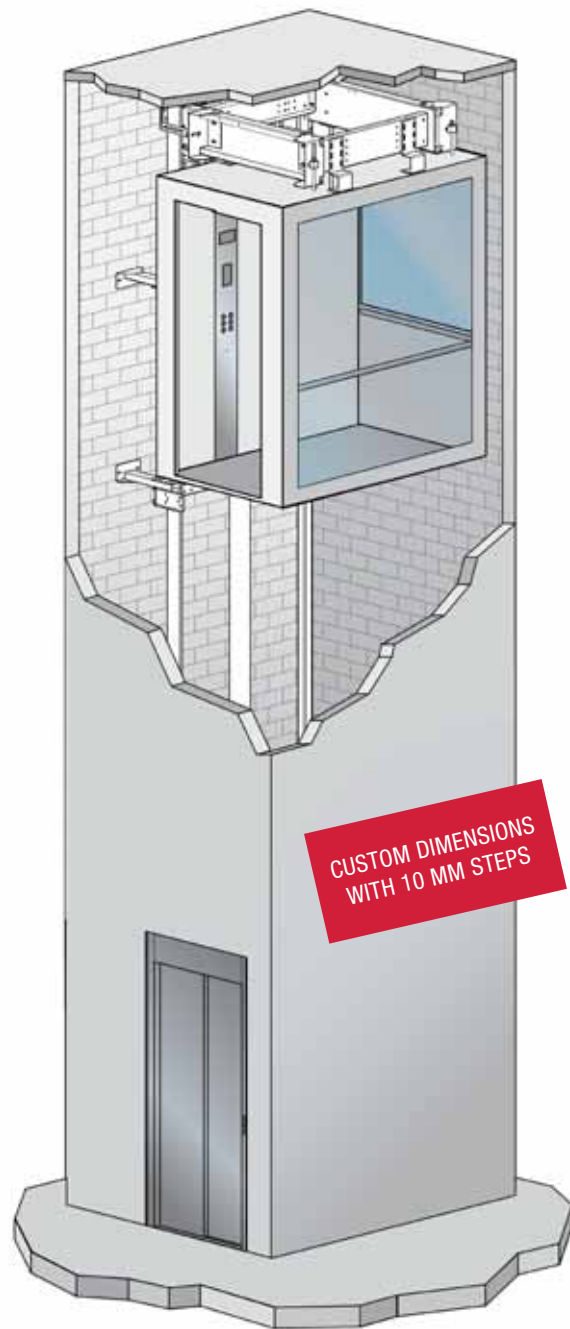

### MAX. DIMENSIONS

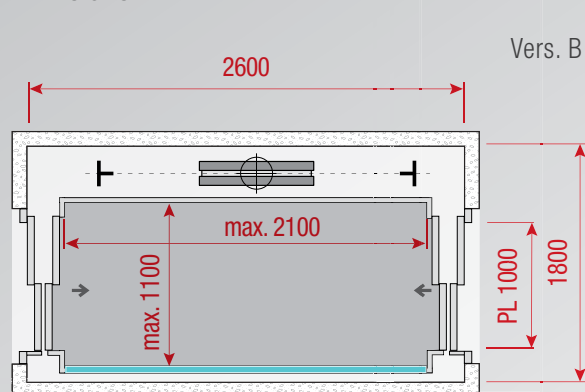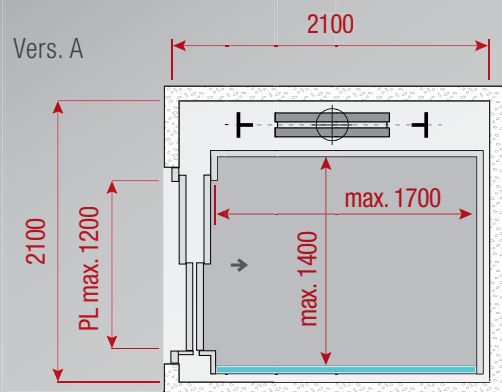



OUTDOOR



INDOOR



SUGGESTED  
USE



SUGGESTED  
USE



MAX PAYLOAD



3-PHASE  
400 Vac

## ■ PAYLOAD AND SPEED IN TOTAL SAFETY

DOMINO is our top range lift, and it matches the inDOMO flexibility to a 1000 kg payload to the standard speed of an elevator. Ideal for apartment buildings and prestigious residencies which require a faster and versatile lift.


## ■ ELEGANCE AND DESIGN

Equipped with elegants SMART or STYLE cabins, whose design has been recently updated, DOMINO is suited for prestigious residencies or even office or commercial centres.


## ■ REDUCED PIT

Our «reverse» car sling allows for an easy installation wherever a reduced pit is necessary thus reducing structural problems from the very beginning.

PAYLOADS:	From 500 up to 1000 kg
TRAVEL:	Up to 20 m
STOPS:	Up to 8 (in line)
ENTRANCES:	Up to 3
SPEED:	0,60 m/s
SHAFT:	Masonry shaft or Anti-seismic structure
CONTROL:	Automatic
NOISE LEVEL:	48 dB
CABIN DIMENSION:	Max. 1400 (L) x 1700 (P)
CABIN HEIGHT (CH):	Std. 2100 mm (min. 2000 – max. 2200)
DOOR HEIGHT:	Std. 2000 mm (min. 1800 – max. 2100)
HEADROOM:	up to 630 kg Std. CH+600 mm - min. CH+500 mm beyond 630 kg Std. CH+700 mm - min. CH+650 mm
PIT:	Std. 200 mm - min. 150 mm
CYCLES/HOUR:	45
POWER SUPPLY:	3-phase 400 Vac
MAIN CONTROL PANEL and HYDRAULIC SYST.:	In metal cabinet (optional)
REFERENCE REGULATION:	EN81.21 - EN81.20/50

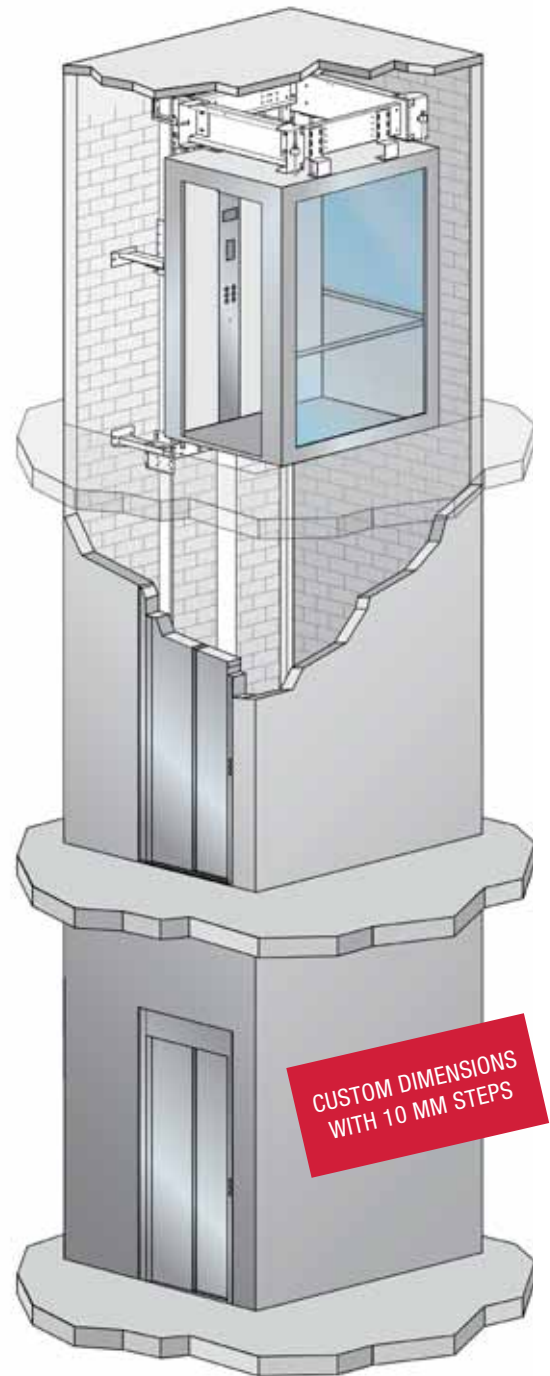

## MAX. DIMENSIONS

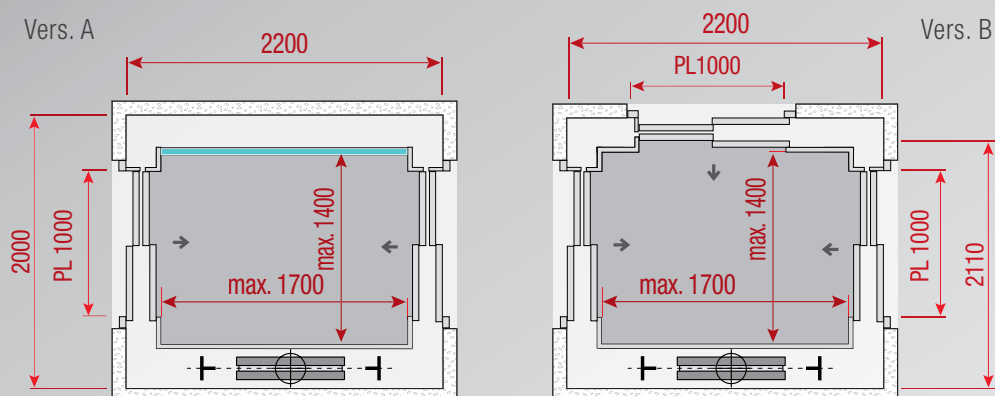



**LIFTINGITALIA**<sup>®</sup>  
MODULAR COMFORT LIFTS

**LIFTING ITALIA S.r.l.**

Via Caduti del Lavoro, 16  
43058 Bogolese di Sorbolo (Parma), Italy  
tel +39 0521.695311  
fax +39 0521.695313  
info@liftingitalia.com  
www.liftingitalia.com

Authorized reseller:

**MADE IN ITALY**